



厦门宏发电力电器有限公司

Xiamen Hongfa Electric Power Control Co.,Ltd.

电话: (86) -592-6151166

传真: (86) -592-6150698

网址: Web site:www.hf-relay.com

产品规格书

Specification

文件编号 File No. :4588700GGS033

产品名称 Product Name: 直流继电器 DC RELAY

产品型号 Product model: HFE82V-250-XXX-XX-HX5X

发布日期 Publish Date: 2019.7.16

生产工厂 Production Plant: 厦门宏发电力电器有限公司
Xiamen Hongfa Electric Power Controls Co.,Ltd.

版本 Version: e

宏发审批签字 Signature by Hongfa			顾客确认 Customer Approval
拟制 Make	审核 Check	批准 Approved	负责人 By:
 19.7.15	 2019.7.15	 2019.7.16	日期 Date:
特别说明: 1. 此规格书请顾客在 2 周内确认, 如未在规定时间内答复, 则视为同意。 2. 自提供规格书之日起 2 年内, 顾客没有下单订货, 本规格书失效。 Especially claim: 1. This specification is expected to be checked within 2 weeks. Without feedback after 2 weeks, Hongfa will take it as granted that customer approves of this specification. 2. This specification will be invalid if no order within 2 years.			

变更履历 Revisions Record

顾客 Customer		产品型号 Part No.		
变更版 Version No.	变更日期 Change Date	变更内容 Description	原因 Reason	负责人 By
a	2017.3.6	新增 Creation	新增 Creation	陈建华 Jianhua Chen
b	2017.8.7	①新增卧式型号规格及其外形图，具体见条款12和13.1。 Add horizontal type and its outline drawings, see article 12 and 13.1. ②新增贮存条件，具体见11。 Add Storage Condition, see article 11. ③更新规格书版式。 Update the specification format.	更新 Update	陈建华 Jianhua Chen
c	2018.2.7	①更新外形图 Update outline dimensions ②更新规格书版式。 Update the specification format.	更新 Update	洪尧山 Yaoshan Hong
d	2018.11.3	更新 2.3 接触电阻在额定电流下测试 Measure contact resistance at rated current.	刷新标准 Update standard	洪尧山 Yaoshan Hong
e	2019.7.15	更新 13.1 产品外形图 安装脚垫圈露出高度 Update 13.1 product profile drawing install foot washer exposed height.	刷新标准 Update standard	赵凯凯 Kaikai Zhao

HFE82V-250 规格书

HFE82V-250 Relay Specification

1 线圈额定参数 Coil Rating

额定电压 Rated Voltage Vd. c.	动作电压 Operate Voltage Vd. c. (at 23 °C)	释放电压 Release Voltage Vd. c. (at 23 °C)	线圈电阻 Coil Resistance Ω (at 23 °C)	线圈功耗 Coil Power W (at 23 °C) 大约 Approx.
12	≤ 9	≥ 1	$24 \times (1 \pm 7\%)$	6
24	≤ 18	≥ 2	$96 \times (1 \pm 7\%)$	6

2 触点参数 Contact Specification

- 2.1 触点形式 Contact Arrangement: 一组常开 H 1 Form A
- 2.2 触点材料 Contact Material: 铜合金 Copper Alloy
- 2.3 接触电阻 Contact Resistance: $\leq 0.2 \text{ m}\Omega$ (at 250 A)
- 2.4 触点额定负载 Contact Rating: 250 A (100 mm² wire)
- 2.5 最大分断电流 Max. Breaking Current: 见 3.1 see 3.1
- 2.6 最大切换电压 Max. Switching Voltage: 750 Vd. c.
- 2.7 最小适用负载 Min. Applicable Load: 6 Vd. c. 1 A
- 2.8 电流耐受 Current Endurance

电流 Current	时间 Duration
250A 持续	持续/cont.
375 A	10 min
500 A	120 s
1000 A	30 s
2500 A	0.6 s

电流耐受条件 Condition for current endurance

- 1) 环境温度 Ambient temperature: 85 °C;
- 2) 线圈激励电压为线圈额定电压 Supply rated voltage to coil;
- 3) 使用 100mm² 线径铜导线连接 The cross section area of wire is 100 mm².

3 耐久性 Endurance

3.1 电耐久性 Electrical Endurance

产品型号 Product model	结构型式 Version	环境温度 Ambient Temperature	触点负载 Contact Rating	通断比 ON: OFF	电耐久性 Electrical Endurance
HFE82V-250	一组常开 1H	常温 Room Temperature	正向接通 Forward making: (冲击 Inrush 400 A RC=1 ms) 稳态 Steady 250 A 触点电压 Contact Voltage 22.5 Vd. c.	0.6 s:5.4 s	2.5×10 ⁴ 次 (ops)
			正向接通 Forward making: (冲击 Inrush 140 A, RC=1 ms) 触点电压 Contact Voltage 20 Vd. c.	0.5 s:9.5 s	7×10 ⁴ 次 (ops)
			正向接通 Forward making: (冲击 Inrush 1350 A, RC=1 ms) 触点电压 Contact Voltage 300 Vd. c.	0.6 s:5.4 s	1次(ops)
			正向极限分断 Forward limit breaking (L/R≤1 ms): 稳态 Steady 2000 A 触点电压 Contact Voltage 450 Vd. c	0.6 s on	1次(ops)
			正向分断 Forward breaking (L/R≤1 ms): 稳态 Steady 400 A 触点电压 Contact Voltage 450 Vd. c	0.6 s:5.4 s	50次(ops)
			正向切换 Forward switching: 稳态 Steady 250 A 触点电压 Contact Voltage 450 Vd. c.	0.6 s:5.4 s	1000次 (ops)
			正向切换 Forward switching: 稳态 Steady 250 A 触点电压 Contact Voltage 750 Vd. c.	0.6 s:5.4 s	500次(ops)
			反向分断 Reverse breaking (L/R≤1 ms): 稳态 Steady -200 A 触点电压 Contact Voltage 400 Vd. c	0.6 s:5.4 s	1000次 (ops)
			反向切换 Reverse switching: 稳态 Steady -250 A 触点电压 Contact Voltage 750 Vd. c.	0.6 s:5.4 s	10次(ops)

3.2 机械耐久性 Mechanical Endurance

结构型式 Version	触点负载 Contact Rating	环境温度 Ambient Temperature	通断比 ON: OFF	机械耐久性 Mechanical Endurance
1 组常开 1H	无负载 No load	常温 Room Temperature	0.4s:0.6 s	2×10^5 次 (ops)

4 绝缘电阻 Insulation Resistance

4.1 试验前 Before Test

断开触点电路的各引出端之间 Between open contacts: 1000 M Ω (1000 Vd. c.)

触点引出端与线圈引出端之间 Between contact and coil: 1000 M Ω (1000 Vd. c.)

4.2 试验后 After Test

断开触点电路的各引出端之间 Between open contacts: 50 M Ω (1000 Vd. c.)

触点引出端与线圈引出端之间 Between contact and coil: 50 M Ω (1000 Vd. c.)

5 介质耐压 Dielectric Strength (漏电流 Leak Current:1 mA)

5.1 试验前 Before Test

断开触点电路的各引出端之间 Between open contacts: 3000 Va. c. (50/60 Hz 1 min)

触点引出端与线圈引出端之间 Between contact and coil: 4000 Va. c. (50/60 Hz 1 min)

5.2 试验后 After Test

断开触点电路的各引出端之间 Between open contacts: 2300 Va. c. (50/60 Hz 1 min)

触点引出端与线圈引出端之间 Between contact and coil: 3000 Va. c. (50/60 Hz 1 min)

6 时间参数 Time(额定电压下 At Rated Voltage)

6.1 动作时间 Operate Time: ≤ 50 ms

6.2 释放时间 Release Time: ≤ 30 ms

6.3 回跳时间 Bounce Time: ≤ 5 ms

7 振动 Vibration

正弦振动, 1.5 mm 双振幅, 10 Hz~500 Hz, 加速度 49 m/s², 三个相互垂直轴线的每一个方向 8 h (激励和非激励各 4 h), 共 24 h。继电器外观、结构和性能不应有异常。
Sinusoidal vibration, 1.5 mm double amplitude, 10 Hz to 500 Hz, acceleration 49 m/s², 8 hours each for every axis, 4 hours each for the energized and non-energized status, total 24 hours. There shall not be any abnormalities on relay appearance, construction and performance.

8 冲击 Shock

8.1 稳定性 Functional

线圈激励, 196 m/s²(脉冲持续时间 11 ms), 线圈非激励, 98 m/s²(脉冲持续时间 11 ms), 3000 次(三个相互垂直轴线的每一个方向 500 次, 激励和非激励各 250 次), 闭合回路的断开或开路回路的闭合时间应不超过 10 μs。energized status 196 m/s², duration 11 ms, non-energized status 98 m/s², duration 11 ms, 500 ops for each direction of three mutually perpendicular axes, 250 ops each for the energized and non-energized status, total 3000 shocks. The opening time for close contacts or the closing time for open contacts should not exceed 10 μs.

8.2 强度 Destructive

490 m/s² (脉冲持续时间 6 ms) , 300 次(三个相互垂直轴线的每一个方向 50 次) 继电器外观、结构和性能不应有异常。490 m/s², duration 6 ms, 50 shocks for each directions of three mutually perpendicular axes, total 300 shocks . There shall not be any abnormalities on relay appearance, construction and performance.

9 标准测试条件 Standards Test Condition

9.1 温度 Temperature: 23 °C ± 5 °C

9.2 湿度 Humidity: 25 % ~ 75% RH

9.3 方向 Direction of Measurement: 任意 Free

10 使用条件 Operating Condition

10.1 温度 Temperature: -40 °C ~ 85 °C

10.2 湿度 Humidity: 5 % ~ 85 % RH

10.3 安装方向 Mounting Direction: 任意 Free

注: 使用环境条件不能导致继电器内部产生结露、结冰, 否则会导致继电器失效。

Note: The ambient environment of application shall not cause any dewing or icing inside the relay. Otherwise, the relay may fail to work consequently.

11 贮存条件 Storage Condition

11.1 温度 Temperature: -40°C ~ 85°C

11.2 湿度 Humidity: 5% ~ 85% RH

12 订货标记 Ordering Information


HFE82 V - 250 / 750 - 12 - H L 5 Y (XXX)
 ① ② ③ ④ ⑤ ⑥ ⑦ ⑧ ⑨ ⑩

- | | |
|----------------------------|---|
| ① 产品型号 Type | HF82 |
| ② 应用场合 Application | V: 新能源汽车领域 Vehicle
无 (Nil): 新能源电源控制 |
| ③ 系列代号 Series Code | 250: 250A |
| ④ 负载电压 Load Voltage | 无: 450 Vd. c.
750: 750 Vd. c. |
| ⑤ 线圈电压 Coil Voltage | 12:12 Vd. c.
24:24 Vd. c. |
| ⑥ 触点形式 Contact Type | H: 一组常开 1 Form A |
| ⑦ 线圈引出端形式 coil termination | L: 引出线 wire
B: 引出线+连接器 Wire + Connector |
| ⑧ 负载引出端形式 Load termination | 5: 内螺纹 Bolt terminal Female |
| ⑨ 安装形式 Mounting | 无 Nil: 立式安装 Vertical Mounting
Y: 卧式安装 Horizontal Mounting |
| ⑩ 特殊特性号 Special Code | 客户需求 (当客户存在特殊需求时使用)
customer demand Only for special
Requirements |


13 产品结构 Configuration

13.1 外形图 Outline Dimensions:


型号: HFE82V-250/XXX-XX-HL5

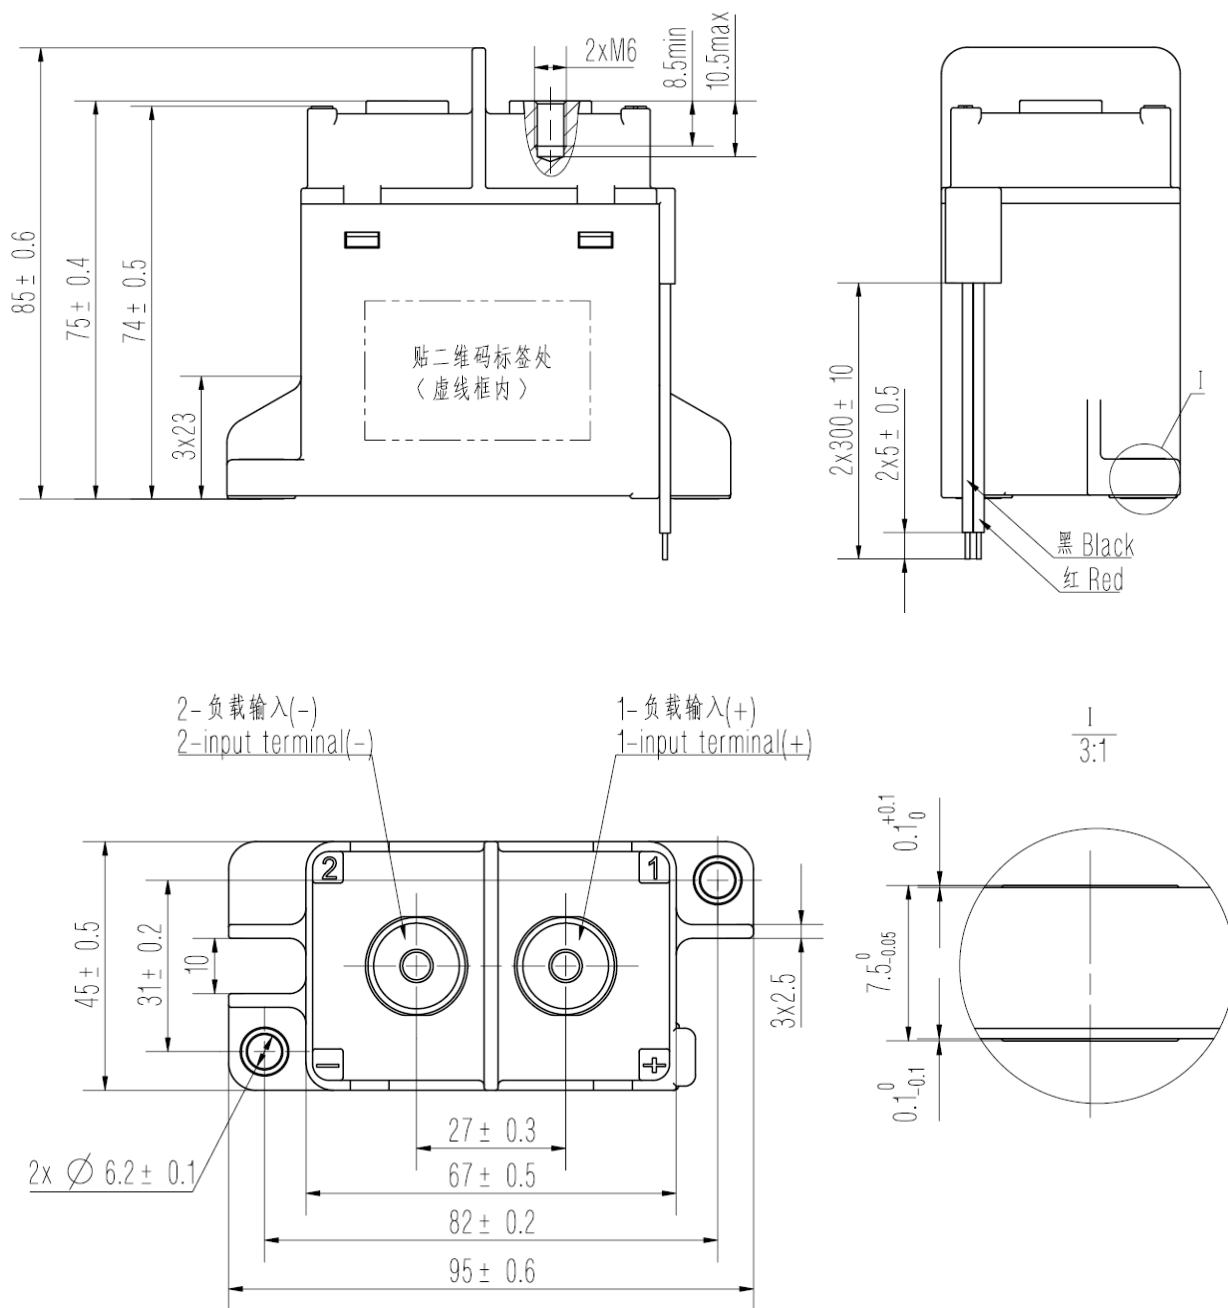





型号: HFE82V-250/XXX-XX-HL5Y

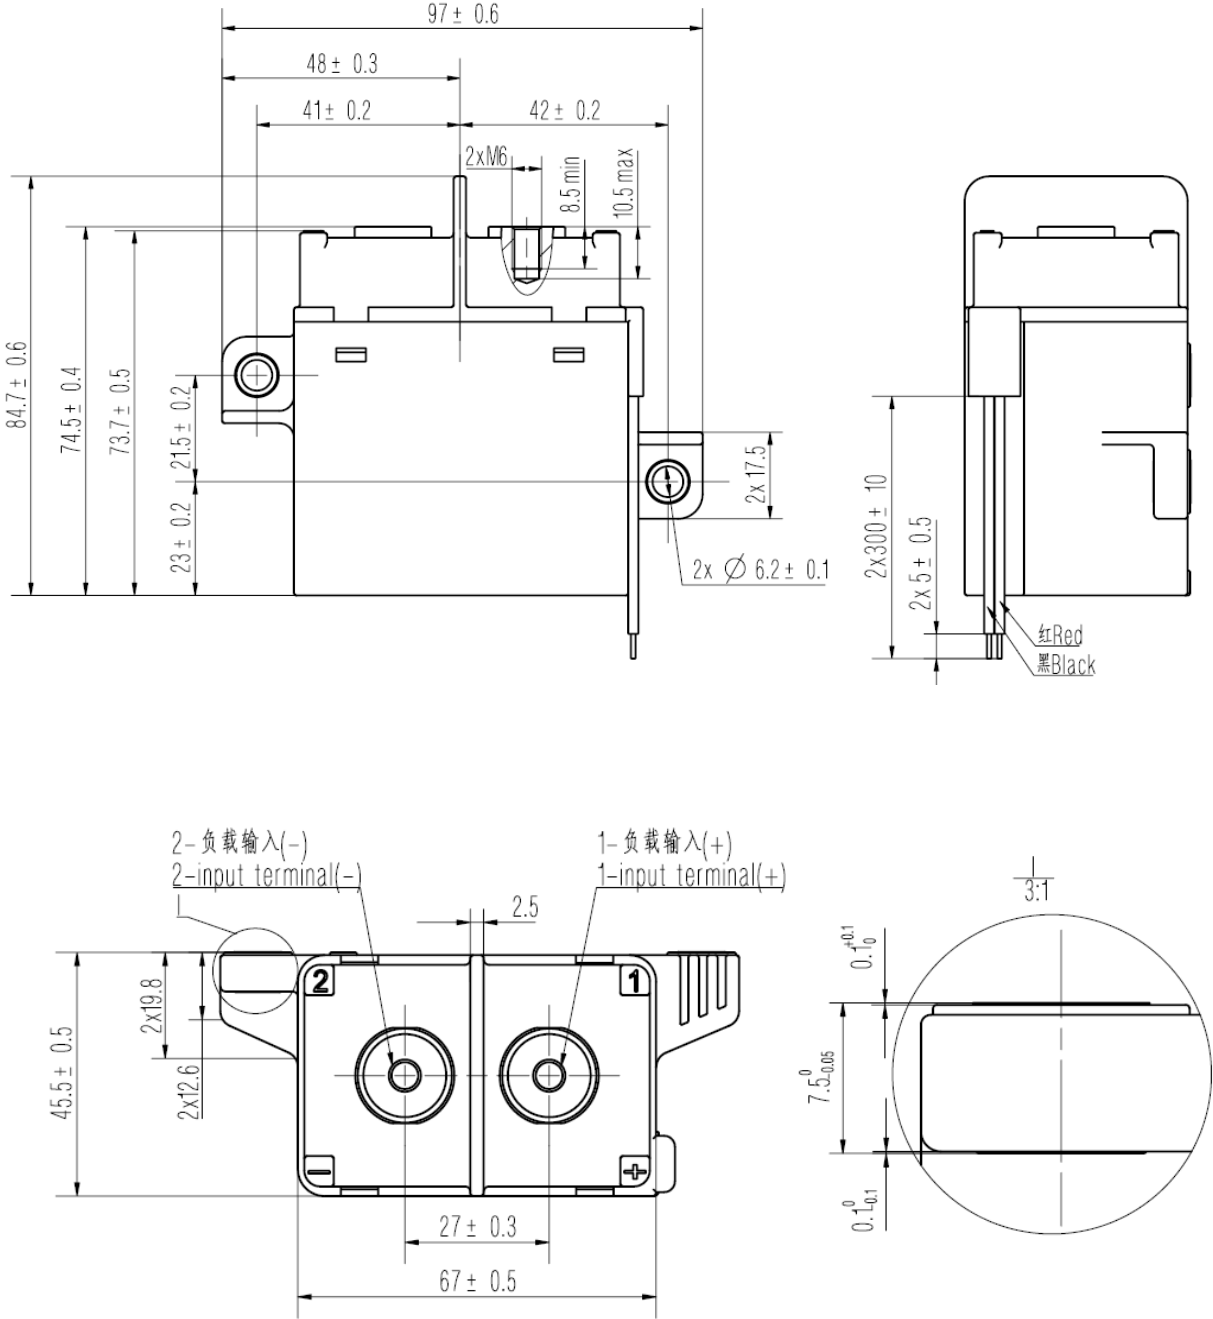

型号: HFE82V-250/XXX-XX-HB5

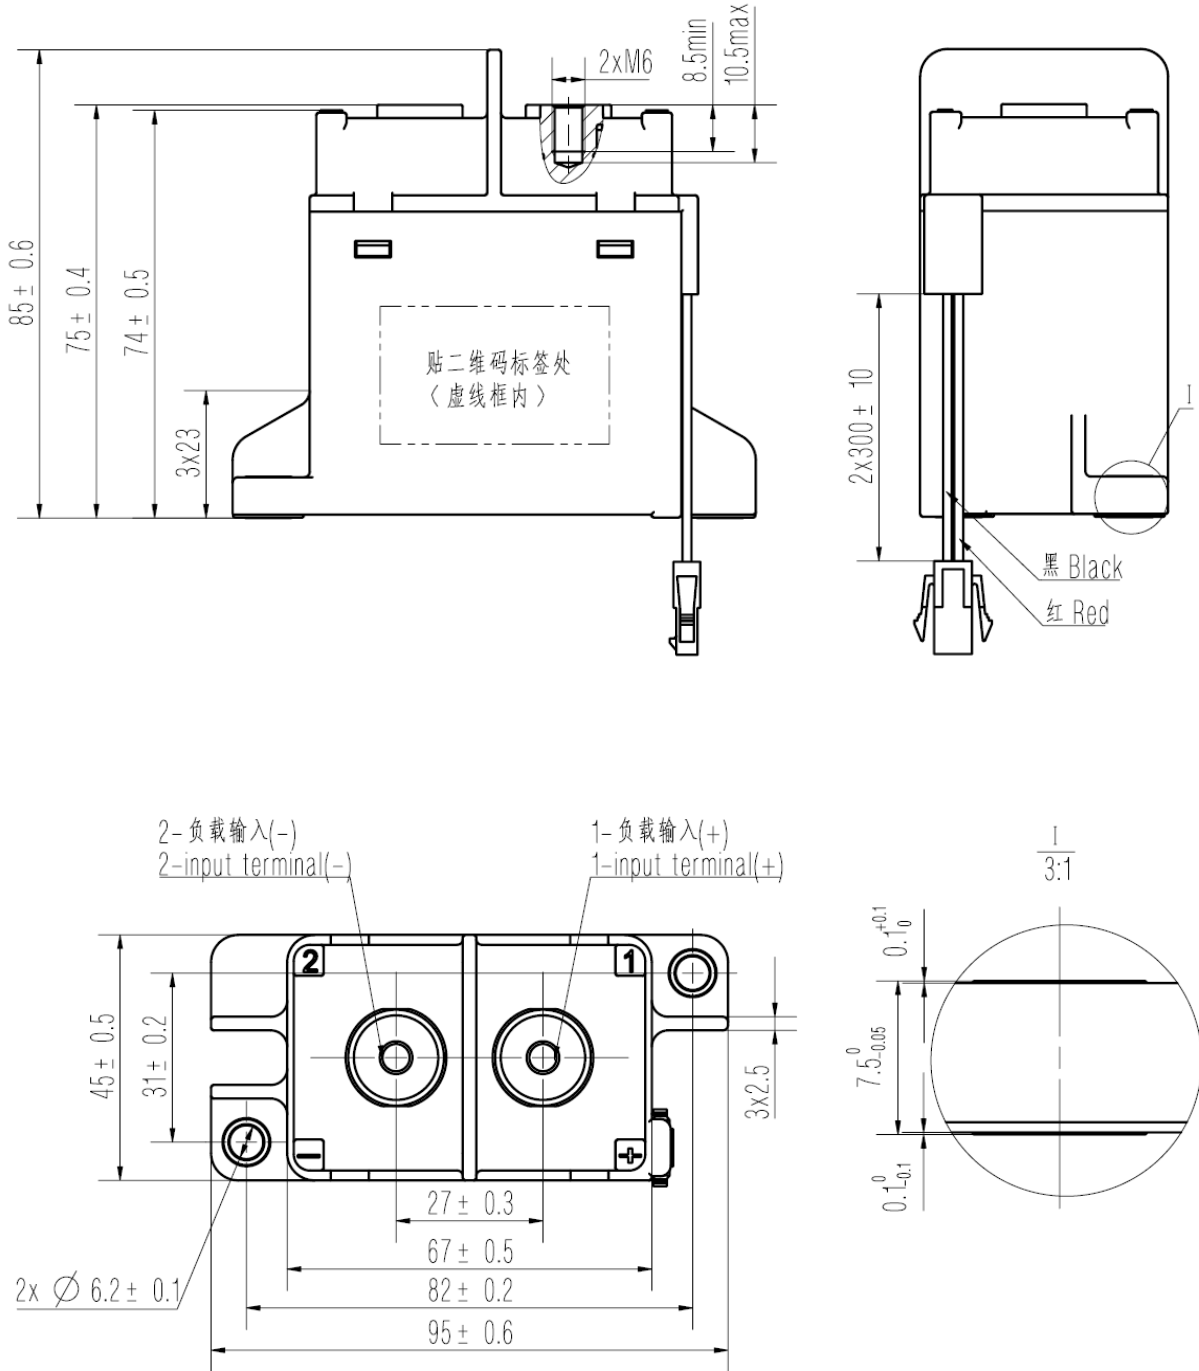

型号: HFE82V-250/XXX-XX-HB5Y

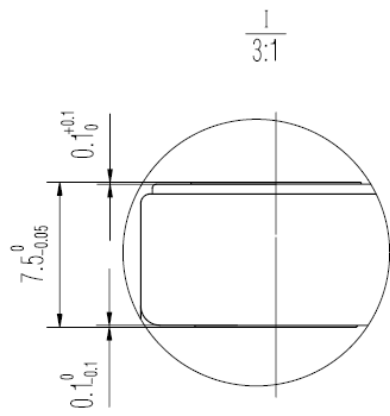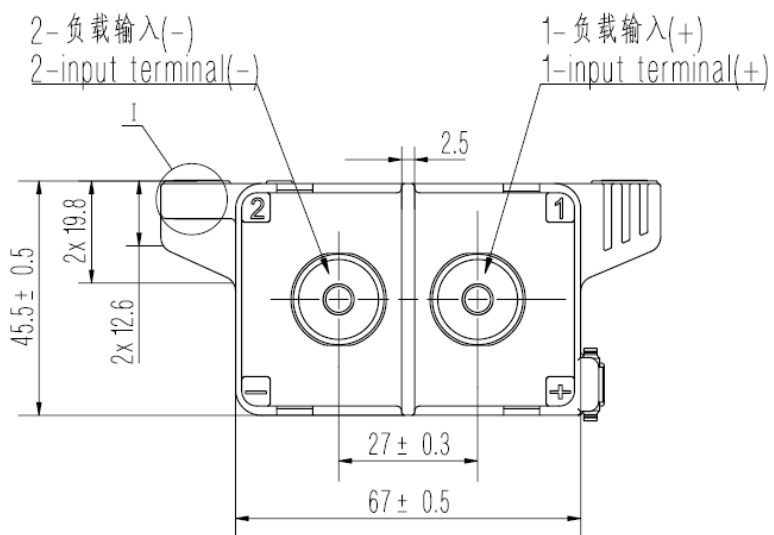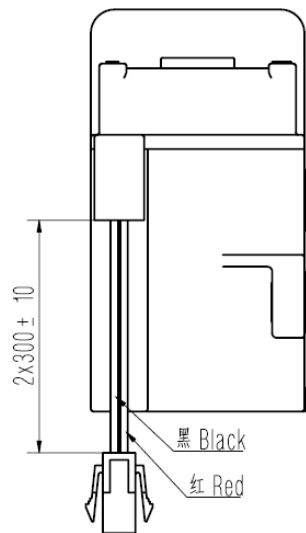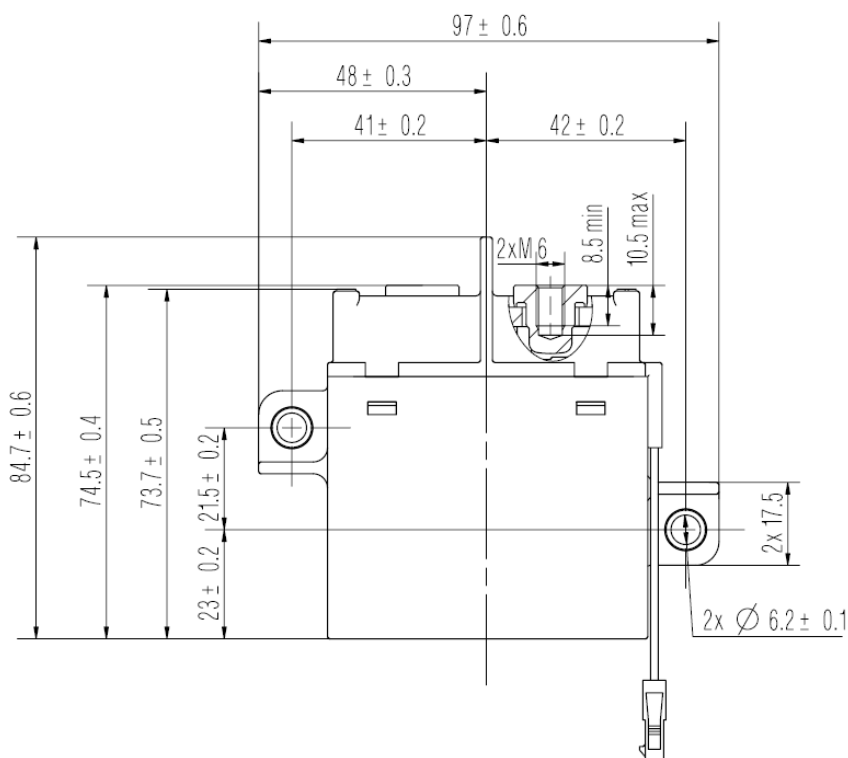


产品型号 Product model	重量 Unit Weight
HFE82V-250/XXX-XX-HL5	约 570g
HFE82V-250/XXX-XX-HL5Y	
HFE82V-250/XXX-XX-HB5	
HFE82V-250/XXX-XX-HB5Y	


备注：线圈引出方式有线圈引出线和引出线+连接器，标准线圈引出线长度为 300 ± 10 mm，特殊长度可定制。引出线+连接器尺寸详见线圈引出形式B：引出线+连接器。

Note: The coil terminals can be wire or wire + Connector .The standard length of the wire is 300 ± 10 mm, and the special length can be customized. Please take below drawing for the dimension of the wire + Connector .

线圈引出形式 coil termination

B: 引出线+连接器 Wire + Connector

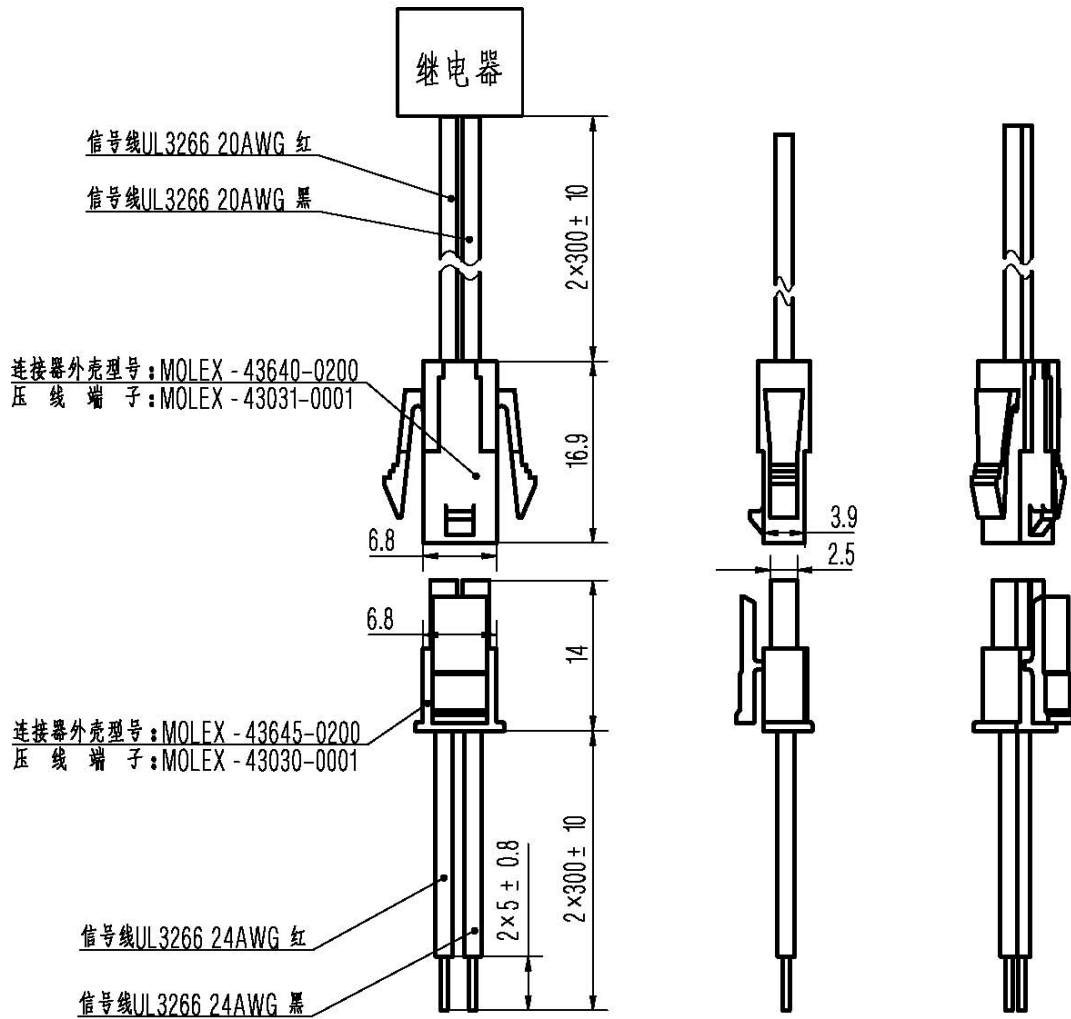

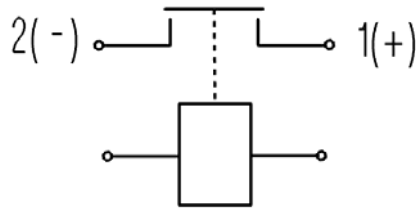

13.2 接线图 Wiring Diagram

注1：负载有极性、线圈无极性

Note 1: Polarity option on the load; no polarity on coil.;

注 2：产品外形尺寸未注尺寸公差按下表执行。

Note 2: All unspecified tolerance according to following table.

产品外形尺寸未注尺寸公差 Outline dimensions hadn't specified tolerance	
外形尺寸 Outline Dimensions	公差 Tolerance
≤10	±0.3
>10~50	±0.5
>50	±0.8

14 其他说明 Others

14.1 供应商 Supplier

厦门宏发电力电器有限公司 Xiamen Hongfa Electric Power Controls Co., Ltd.

14.2 规格书内的各项性能参数是基于标准测试条件下测得的初始值。All the performance data listed in the datasheet are the initial values tested under standard testing condition.

14.3 注意事项 Notes

14.3.1 对宏发而言，不可能评定继电器在每个具体应用领域的所有性能参数要求，因而客户应根据具体的使用条件选择与之相匹配的产品，若有疑问，请与宏发联系，以便获取更多的技术支持；但产品选型责任仅由客户负责。Hongfa could not evaluate all the performance and all the parameters for every potential application. The customer can choose the right product according to the specific usage conditions and requirements. If there is any queries, please contact Hongfa for the technical service. However, customer will responsible for what they choose and it is the user's responsibility to determine which product should be used.

14.3.2 我司承诺的负载, 在没有特别说明时, 均指额定负载, 产品使用于我们承诺的负载条件之外时, 我公司不承担因此造成的失效责任。Without special note , the load we commit to the load is the rating load .Hongfa doesn't response for any usage beyond our guarantee.

14.3.3 触点额定值均为阻性负载时的数值, 使用 $L/R \geq 1\text{ms}$ 的感性负载 (L 负载) 的情况下, 请与感性负载并行采取浪涌吸收措施。未采取措施的情况下, 可能会造成电气寿命下降、发生切断不良。The rating load of contact is resistive load. Please assure a surge absorption device together with inductive load when using the $L/R \geq 1\text{ms}$ inductive load (L Load), otherwise it may lead to the decrease of electrical endurance and defective switch.


14.3.4 为抑制继电器线圈的反向电动势, 建议加装非线性电阻 (推荐使用可变电阻, 最大能量耐量: 1J 以上; 电压: 额定电压的 1.5~2 倍)。若使用二极管, 会使继电器释放时间大大加长, 肯定会导致切断性能下降, 敬请注意。In order to curb the reverse electromotive force of coil, a nonlinear resistor is recommended to use (ZNR is recommended, the max energy tolerance: $\geq 1\text{J}$; Voltage: 1.5~2 times the rated voltage). Please be noted that a diode will make the release time of relay increase, which should lead to the degradation of cutting-off capability.

14.3.5 本继电器的内部触点使用了气体保护, 伴随着触点温度变化 (环境温度+通电致使温度上升) 而存在内部气体穿透, 严禁将继电器长时间置于超过产品温度使用范围 ($-40\text{ }^{\circ}\text{C} \sim 85\text{ }^{\circ}\text{C}$) 环境中。The relay contacts are sealed and filled with gas. When the contact temperature changes, there is internal gas penetrating characteristic. Hongfa relays are forbidden to be used at the temperature beyond our suggestion $-40\text{ }^{\circ}\text{C} \sim 85\text{ }^{\circ}\text{C}$ for long time.

14.3.6 请避免在强磁界 (变压器、磁铁的周围) 和发热物体的附近安装。Please avoid installation in strong magnetic field (around the transformers & the magnet) and the heating objects nearby.

14.3.7 为防止出现松动, 继电器安装时请使用垫圈。继电器安装处请使用 M5 螺钉, 螺钉锁紧扭矩请控制在 $3\text{N} \cdot \text{m} \sim 4\text{N} \cdot \text{m}$ 。In order to prevent loosening, please use the washer when installing the relay. Please use the M5 screws to install relay, screw locking torque within $3\text{N} \cdot \text{m} \sim 4\text{N} \cdot \text{m}$.

14.3.8 使用 M5 螺钉时, 确保垫圈厚度和强度足够, 否则会变形, 撑破外壳。When use M5 screw, make sure the washer's thickness and strength are enough. Otherwise it will be out of shape, and the case will be broke.

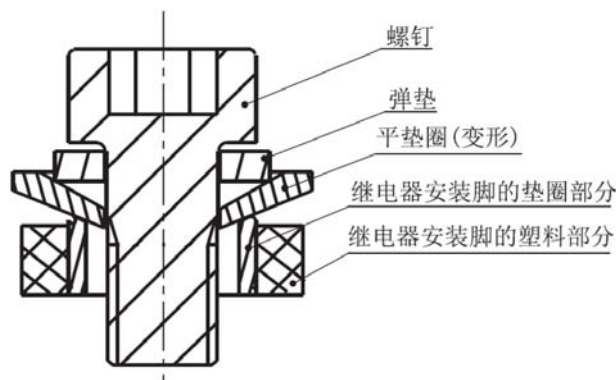

14.3.9 请避免在引出片上粘附油脂等异物，请使用 100 mm² 以上规格的连接导线，否则有可能会造成引出端部分的异常发热。Please avoid grease and other foreign matter in the terminal, please use the connecting wire with a cross section area ≥ 100 mm², or they may cause overheating to the terminal part .

14.3.10 注意连接铜排的厚度和扭矩大小，若超出下表建议的数值，会造成螺纹滑牙或安装不紧的问题。不建议将两铜排安装在同一侧，避免高压短路或打火。Please pay attention to the thickness of copper bars and the value of the torque. If it goes beyond the recommended values in the below table , it will cause thread slide or installation is not tight.To avoid short circuit or fire,it' s not suggest fix two copper bus bar at same side.

负载引出端螺钉大小 screw on load terminal	建议铜排厚度 the thickness of copper bus bar	建议铜牌开孔尺寸 suggest hole dimension of copper bus bar	扭矩大小 Torque
M 6	3 mm	$\Phi 6.0\text{mm} \sim \Phi 6.5\text{mm}$	9 N·m~11 N·m

14.3.11 在继电器坠落的情况下，原则上请不要再使用。In principle, please do not use it when the relay has fallen down.

14.3.12 环保措施 Environmental Protection

宏发产品均符合 RoHS 要求。Hongfa products are all RoHS compliant.

14.3.13 宏发保留对产品更改的权利，客户在首次下单之前应确认此规格书内容，必要时可要求我司提供新的规格书。Hongfa reserves the right to make changes. Customers should reconfirm the contents of the specification before first orders and ask for us to supply a new specification if necessary.